



QALCOSO W1

← DN15, DN20, DN25, DN32, DN40



WWW




ISO 4064-1-2017



M1
2014/32/UE



E1 / E2
ISO 4064:2014
2014/32/EU

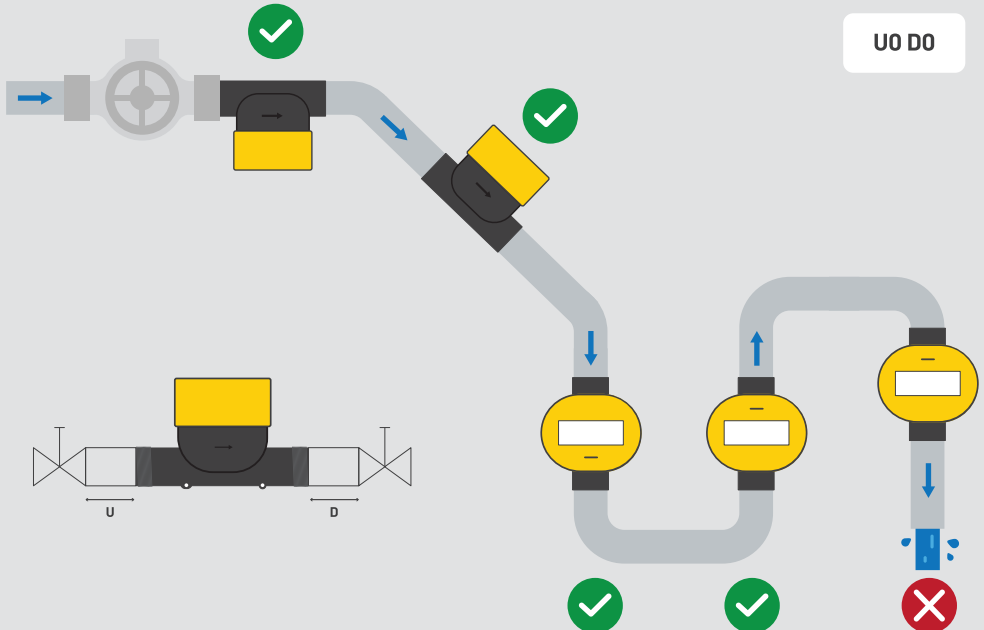


T30 max 30°C
T90 max 90°C
(33 F ... 194 F)




Max 16 bar
(Max 260 psi)

-15°C...+70°C
-59 F...+158 F

UV

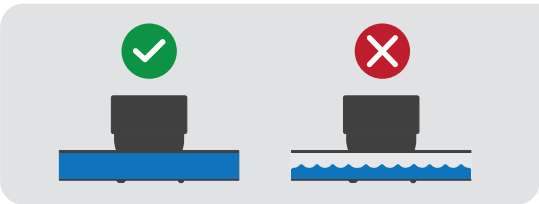

DN15	DN20	DN25	DN32	DN40
27 mm	31 mm	41 mm	49 mm	55 mm
30 Nm	35 Nm	40 Nm	40 Nm	40 Nm

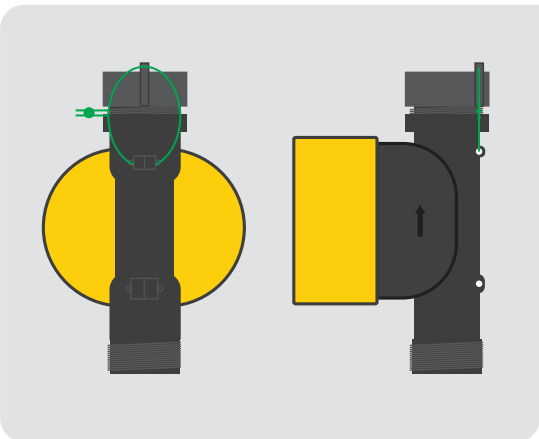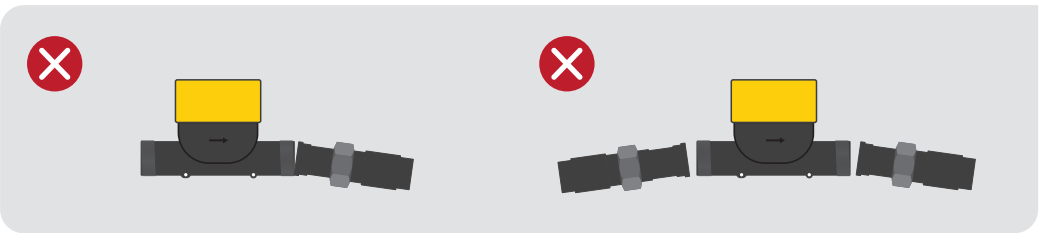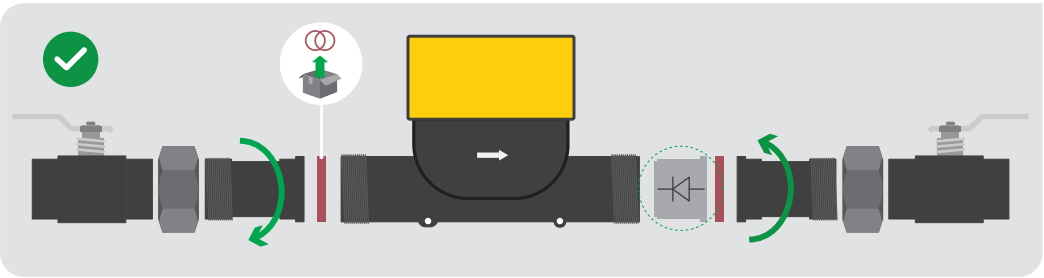

Two digital display screens showing flow data. The top screen displays "000000.000 m³" and "00000 m³/h" with a green upward arrow icon. The bottom screen displays "000000.0 10 m³" and "00000 m³/h" with a blue wireless signal icon. Below the screens, there is a water drop icon and the text "10 l (3 GAL)".